

Siemens  
EcoTech



Circuit breaker size S3 for motor protection, CLASS 10 A-release 36...50 A N-release 650 A screw terminal Standard switching capacity



|                                                                 |                      |
|-----------------------------------------------------------------|----------------------|
| product brand name                                              | SIRIUS               |
| product designation                                             | Circuit breaker      |
| design of the product                                           | For motor protection |
| product type designation                                        | 3RV2                 |
| <b>General technical data</b>                                   |                      |
| size of the circuit-breaker                                     | S3                   |
| size of contactor can be combined company-specific              | S3                   |
| product extension auxiliary switch                              | Yes                  |
| power loss [W] for rated value of the current                   |                      |
| • at AC in hot operating state                                  | 27 W                 |
| • at AC in hot operating state per pole                         | 9 W                  |
| insulation voltage with degree of pollution 3 at AC rated value | 1 000 V              |
| surge voltage resistance rated value                            | 8 kV                 |
| shock resistance according to IEC 60068-2-27                    | 25g / 11 ms Sinus    |
| mechanical service life (operating cycles)                      |                      |
| • of the main contacts typical                                  | 25 000               |
| • of auxiliary contacts typical                                 | 25 000               |
| electrical endurance (operating cycles) typical                 | 25 000               |
| reference code according to IEC 81346-2                         | Q                    |
| Substance Prohibitance (Date)                                   | 03/01/2017           |
| SVHC substance name                                             | Lead - 7439-92-1     |
| Weight                                                          | 2.229 kg             |
| <b>Ambient conditions</b>                                       |                      |
| installation altitude at height above sea level maximum         | 2 000 m              |
| ambient temperature                                             |                      |
| • during operation                                              | -20 ... +60 °C       |
| • during storage                                                | -50 ... +80 °C       |
| • during transport                                              | -50 ... +80 °C       |
| relative humidity during operation                              | 10 ... 95 %          |
| <b>Environmental footprint</b>                                  |                      |
| Environmental Product Declaration (EPD)                         | Yes                  |
| global warming potential [CO2 eq] total                         | 283.24 kg            |
| global warming potential [CO2 eq] during manufacturing          | 18.5 kg              |
| global warming potential [CO2 eq] during sales                  | 1.24 kg              |
| global warming potential [CO2 eq] during operation              | 265 kg               |
| global warming potential [CO2 eq] after end of life             | -1.5 kg              |
| Siemens Eco Profile (SEP)                                       | Siemens EcoTech      |

| Main circuit                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| number of poles for main current circuit                                                                                                                                                                                                                                                                                                                                                                                                            | 3                                                                        |
| adjustable current response value current of the current-dependent overload release                                                                                                                                                                                                                                                                                                                                                                 | 36 ... 50 A                                                              |
| type of voltage for main current circuit                                                                                                                                                                                                                                                                                                                                                                                                            | AC                                                                       |
| operating voltage <ul style="list-style-type: none"> <li>• rated value</li> <li>• at AC-3 rated value maximum</li> <li>• at AC-3e rated value maximum</li> </ul>                                                                                                                                                                                                                                                                                    | 20 ... 690 V<br>690 V<br>690 V                                           |
| operating frequency rated value                                                                                                                                                                                                                                                                                                                                                                                                                     | 50 ... 60 Hz                                                             |
| operational current rated value                                                                                                                                                                                                                                                                                                                                                                                                                     | 50 A                                                                     |
| operational current <ul style="list-style-type: none"> <li>• at AC-3 at 400 V rated value</li> <li>• at AC-3e at 400 V rated value</li> </ul>                                                                                                                                                                                                                                                                                                       | 50 A<br>50 A                                                             |
| operating power <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>• at AC-3e <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 11 kW<br>22 kW<br>30 kW<br>45 kW<br><br>11 kW<br>22 kW<br>30 kW<br>45 kW |
| operating frequency <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> <li>• at AC-3e maximum</li> </ul>                                                                                                                                                                                                                                                                                                                                 | 15 1/h<br>15 1/h                                                         |
| Auxiliary circuit                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                          |
| type of voltage for auxiliary and control circuit                                                                                                                                                                                                                                                                                                                                                                                                   | AC/DC                                                                    |
| number of NC contacts for auxiliary contacts                                                                                                                                                                                                                                                                                                                                                                                                        | 0                                                                        |
| number of NO contacts for auxiliary contacts                                                                                                                                                                                                                                                                                                                                                                                                        | 0                                                                        |
| number of CO contacts for auxiliary contacts                                                                                                                                                                                                                                                                                                                                                                                                        | 0                                                                        |
| Protective and monitoring functions                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                          |
| product function <ul style="list-style-type: none"> <li>• ground fault detection</li> <li>• phase failure detection</li> </ul>                                                                                                                                                                                                                                                                                                                      | No<br>Yes                                                                |
| trip class                                                                                                                                                                                                                                                                                                                                                                                                                                          | CLASS 10                                                                 |
| design of the overload release                                                                                                                                                                                                                                                                                                                                                                                                                      | thermal                                                                  |
| maximum short-circuit current breaking capacity (I <sub>cu</sub> ) <ul style="list-style-type: none"> <li>• at AC at 240 V rated value</li> <li>• at AC at 400 V rated value</li> <li>• at AC at 500 V rated value</li> <li>• at AC at 690 V rated value</li> </ul>                                                                                                                                                                                 | 100 kA<br>65 kA<br>12 kA<br>6 kA                                         |
| operating short-circuit current breaking capacity (I <sub>cs</sub> ) at AC <ul style="list-style-type: none"> <li>• at 240 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>                                                                                                                                                                                                 | 100 kA<br>30 kA<br>6 kA<br>3 kA                                          |
| response value current of instantaneous short-circuit trip unit                                                                                                                                                                                                                                                                                                                                                                                     | 650 A                                                                    |
| UL/CSA ratings                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                          |
| full-load current (FLA) for 3-phase AC motor <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>                                                                                                                                                                                                                                                                                               | 50 A<br>50 A                                                             |
| yielded mechanical performance [hp] <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> </ul> </li> </ul>                                                                   | 5 hp<br>10 hp<br><br>15 hp<br>20 hp                                      |

|                            |       |
|----------------------------|-------|
| — at 460/480 V rated value | 40 hp |
| — at 575/600 V rated value | 50 hp |

#### Short-circuit protection

|                                                  |          |
|--------------------------------------------------|----------|
| <b>product function short circuit protection</b> | Yes      |
| <b>design of the short-circuit trip</b>          | magnetic |

#### Installation/ mounting/ dimensions

|                                                                                                                                                |                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <b>mounting position</b>                                                                                                                       | any                                                                      |
| <b>fastening method</b>                                                                                                                        | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| <b>height</b>                                                                                                                                  | 165 mm                                                                   |
| <b>width</b>                                                                                                                                   | 70 mm                                                                    |
| <b>depth</b>                                                                                                                                   | 176 mm                                                                   |
| <b>required spacing</b>                                                                                                                        |                                                                          |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting at the side</li> </ul>                                                     | 0 mm                                                                     |
| <ul style="list-style-type: none"> <li>• for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul> | 70 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                | 70 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                            | 10 mm                                                                    |
| <ul style="list-style-type: none"> <li>• for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>     | 70 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                | 70 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                            | 10 mm                                                                    |
| <ul style="list-style-type: none"> <li>• for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul> | 110 mm                                                                   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                | 110 mm                                                                   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                            | 10 mm                                                                    |
| <ul style="list-style-type: none"> <li>• for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>     | 110 mm                                                                   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                | 110 mm                                                                   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                            | 10 mm                                                                    |
| <ul style="list-style-type: none"> <li>• for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul> | 150 mm                                                                   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                | 150 mm                                                                   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                            | 30 mm                                                                    |
| <ul style="list-style-type: none"> <li>• for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>     | 150 mm                                                                   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                | 150 mm                                                                   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                            | 30 mm                                                                    |

#### Connections/ Terminals

|                                                                                                                                                     |                                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| <b>type of electrical connection</b>                                                                                                                |                                                                    |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>                                                                        | screw-type terminals                                               |
| <b>arrangement of electrical connectors for main current circuit</b>                                                                                | Top and bottom                                                     |
| <b>type of connectable conductor cross-sections</b>                                                                                                 |                                                                    |
| <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid</li> </ul> </li> </ul>                    | 2x (2.5 ... 16 mm <sup>2</sup> )                                   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— solid or stranded</li> </ul> </li> </ul>                           | 2x (2.5 ... 50 mm <sup>2</sup> ), 1x (10 ... 70 mm <sup>2</sup> )  |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— finely stranded with core end processing</li> </ul> </li> </ul>    | 2x (2.5 ... 35 mm <sup>2</sup> ), 1x (2.5 ... 50 mm <sup>2</sup> ) |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— finely stranded without core end processing</li> </ul> </li> </ul> | 2x (10 ... 35 mm <sup>2</sup> ), 1x (10 ... 50 mm <sup>2</sup> )   |
| <b>tightening torque</b>                                                                                                                            |                                                                    |
| <ul style="list-style-type: none"> <li>• for main contacts for ring cable lug</li> </ul>                                                            | 4.5 ... 6 N·m                                                      |
| <b>outer diameter of the usable ring cable lug maximum</b>                                                                                          | 19 mm                                                              |
| <b>tightening torque</b>                                                                                                                            |                                                                    |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> </ul>                                                     | 4.5 ... 6 N·m                                                      |

#### Safety related data

|                                                                                  |      |
|----------------------------------------------------------------------------------|------|
| <b>product function suitable for safety function</b>                             | Yes  |
| <b>suitability for use</b>                                                       |      |
| <ul style="list-style-type: none"> <li>• safety-related switching on</li> </ul>  | No   |
| <ul style="list-style-type: none"> <li>• safety-related switching OFF</li> </ul> | Yes  |
| <b>service life maximum</b>                                                      | 10 a |
| <b>test wear-related service life necessary</b>                                  | Yes  |
| <b>proportion of dangerous failures</b>                                          |      |

|                                                                      |                                                  |
|----------------------------------------------------------------------|--------------------------------------------------|
| • with low demand rate according to SN 31920                         | 40 %                                             |
| • with high demand rate according to SN 31920                        | 50 %                                             |
| <b>B10 value with high demand rate according to SN 31920</b>         | 5 000                                            |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b> | 50 FIT                                           |
| <b>ISO 13849</b>                                                     |                                                  |
| <b>device type according to ISO 13849-1</b>                          | 3                                                |
| <b>overdimensioning according to ISO 13849-2 necessary</b>           | Yes                                              |
| <b>IEC 61508</b>                                                     |                                                  |
| <b>safety device type according to IEC 61508-2</b>                   | Type A                                           |
| <b>T1 value</b>                                                      |                                                  |
| • for proof test interval or service life according to IEC 61508     | 10 a                                             |
| <b>Electrical Safety</b>                                             |                                                  |
| <b>protection class IP on the front according to IEC 60529</b>       | IP20                                             |
| <b>touch protection on the front according to IEC 60529</b>          | finger-safe, for vertical contact from the front |
| <b>Display</b>                                                       |                                                  |
| display version for switching status                                 | Handle                                           |
| <b>Approvals Certificates</b>                                        |                                                  |
| <b>General Product Approval</b>                                      |                                                  |



[KC](#)



|                                 |                                       |                          |                             |
|---------------------------------|---------------------------------------|--------------------------|-----------------------------|
| <b>General Product Approval</b> | <b>For use in hazardous locations</b> | <b>Test Certificates</b> | <b>Maritime application</b> |
|---------------------------------|---------------------------------------|--------------------------|-----------------------------|



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



|                             |              |
|-----------------------------|--------------|
| <b>Maritime application</b> | <b>other</b> |
|-----------------------------|--------------|



[Miscellaneous](#)

|              |                |                    |
|--------------|----------------|--------------------|
| <b>other</b> | <b>Railway</b> | <b>Environment</b> |
|--------------|----------------|--------------------|



[Confirmation](#)



[Special Test Certificate](#)



|                    |
|--------------------|
| <b>Environment</b> |
|--------------------|

[Environmental Confirmations](#)

|                            |
|----------------------------|
| <b>Further information</b> |
|----------------------------|

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>  
 Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2041-4HA10>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2041-4HA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2041-4HA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2041-4HA10&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2041-4HA10&lang=en)


Characteristic: Tripping characteristics,  $I^2t$ , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2041-4HA10/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2041-4HA10&objecttype=14&gridview=view1>

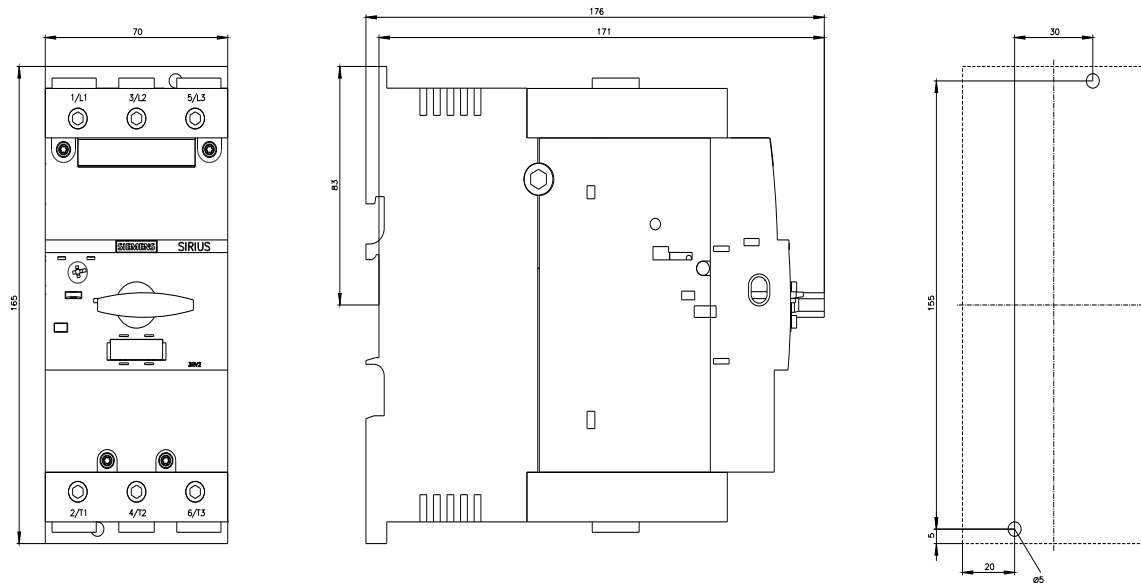

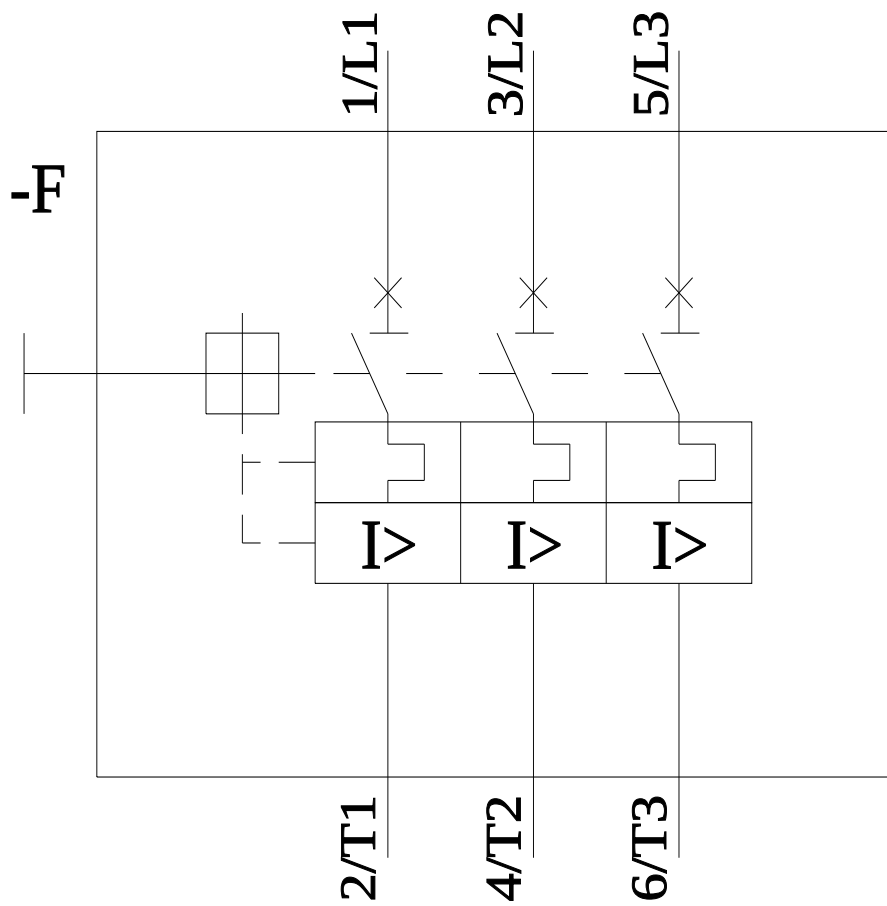

last modified:

5/16/2025 